


PARTS INCLUDED




Scan the QR code to verify that you have the latest instructions or visit

vaultenclosures.com/instructions



VESA MOUNTING PLATE
(2)




#10-32 x 1/4 Panhead Screw
(8)



#10-16 x 1/4 Panhead Blunt Self-tapping Screw
(4)




10-32 Hex Nut
(4)



#10-32 x 3/8 Flathead Screw
(4)


1. CONNECT TO KIOSK MOUNTING

A. INSTALL PLATE ONTO CONNECT

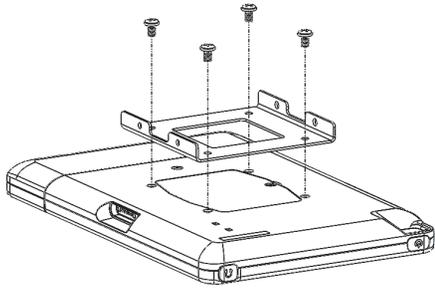


1. Install Plate onto CONNECT using the 4 10-32 x 1/4 pan head screws provided.

C. ROUTE CABLE




1. Route cable on the Plate as shown. Refer to KIOSK instructions for routing the cable through the KIOSK.

E. SCREW THE PLATES TOGETHER




1. Install the 4 10-16 x 1/4 pan head self-tapping sheetmetal screws to screw the two Plates together.

B. INSTALL PLATE ONTO KIOSK



1. Install plate onto KIOSK using the 4 10-32 x 1/4 pan head screws provided.


D. ALIGN CONNECT ONTO KIOSK



1. While your aligning the holes on the two Plates make sure that the cable doesn't get pinched.

2. PRO TO WALL MOUNTING

A. INSTALL PLATE ONTO PRO




1. Install Plate onto PRO using the 4 10-32 x 3/8 pan head screws provided.


* Refer to tablet enclosure instructions before proceeding to step C.

C. SCREW THE PLATES TOGETHER

1. Install the 4 10-16 x 1/4 pan head self-tapping sheetmeal screws to screw the two Plates together.

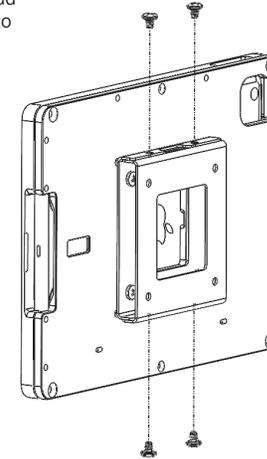

B. INSTALL PLATE ONTO WALL



1. Use appropriate fasteners to mount the bracket to the wall. (Not Included)

REFER TO TABLET ENCLOSURE INSTRUCTIONS TO FINISH YOUR SOLUTIONS ASSEMBLY



* CONNECT IS SHOWN OTHER ENCLOSURE IS SIMILAR



* PRO IS SHOWN OTHER ENCLOSURE IS SIMILAR