



1 VAULT Connect Stand Assembly

Step 1




Route the Connect Stand Cable forwards or backwards. Place your Connect Stand in it's final location.

Step 2

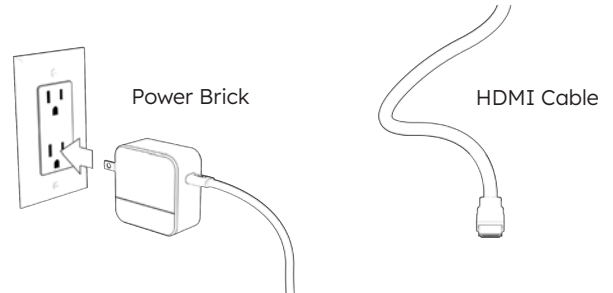


Plug your Power Brick into the wall. Make sure your HDMI cable is connected to your monitor.

Step 3

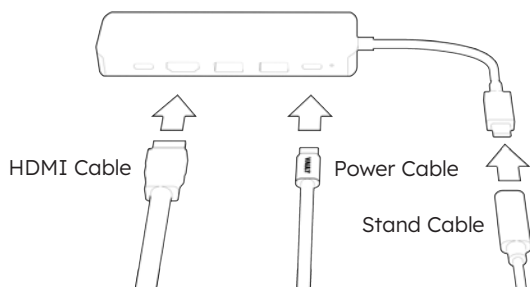


Plug the cables into the Hub as shown.

Step 4

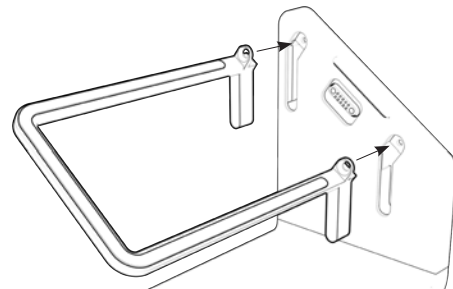


Place the Arm inside the Connect Stand.

Step 5

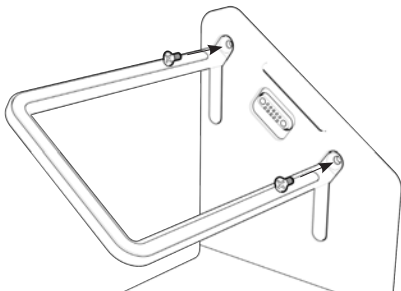

Use the provided screws to secure the arm.

Step 6

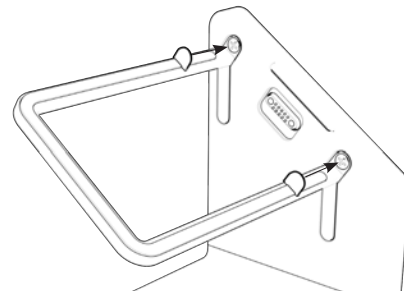


Apply the silicone covers to the screws.

Continue on second side

2 VAULT Connect Case Assembly


Step 1

- Remove the Cap from the Enclosure

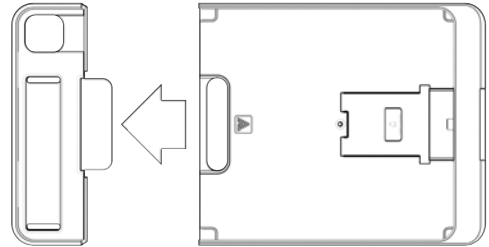


Step 2

- Slide iPad inside Connect Enclosure. Make sure it is pushed in all the way.

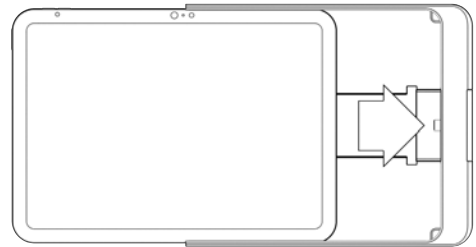


Step 3

- Install the Cap back on the Enclosure. Press until there is a click.

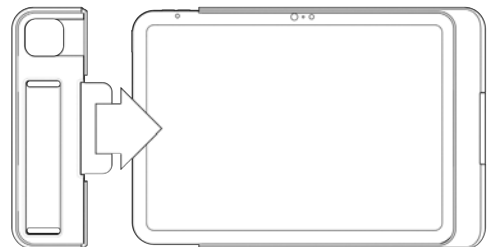

Step 4

- Place the Connect Enclosure on the Connect Stand, ensuring the metal pins on the Enclosure make contact with the receiving pins on the Connect Stand.

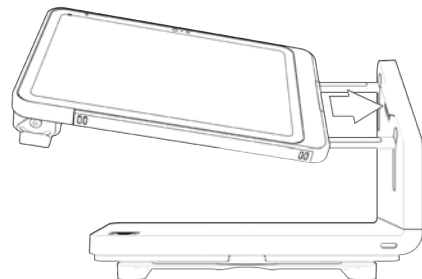

Installation Complete