



NYC1 CARTRIDGE

NYC1

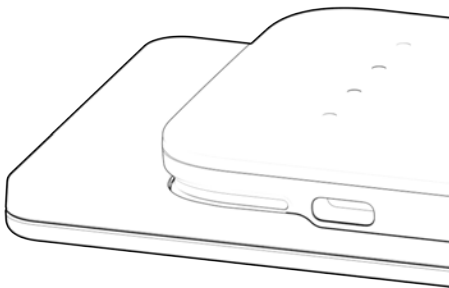

Rev B

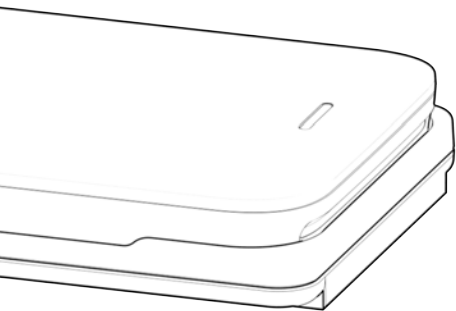

CNX2-NYC1

CONTENTS

What's Included	1
Assembly	3
Disassembly	9

WHAT'S INCLUDED

D:1




Cartridge
(1)

ASSEMBLY

1


Slide the NOCC plate (E) to the side to remove it from the Core (B).

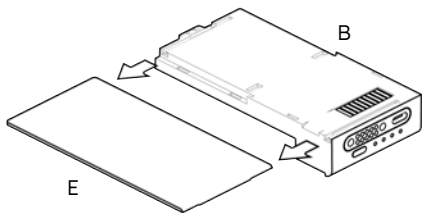

ASSEMBLY


2

Slide the feet of the Cartridge (D:1) into the slots on the Core (B) until it clicks.

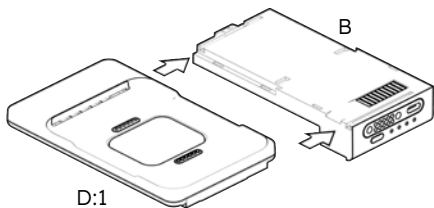

3


Slide the edge of the dip or swipe slot under the Cartridge lip. The Card Reader can be oriented in either direction.

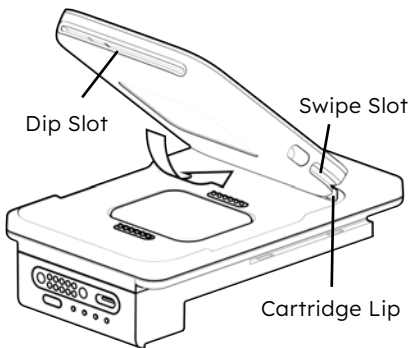

ASSEMBLY

4

Press the second side of the NYC1 reader into the Cartridge recess.

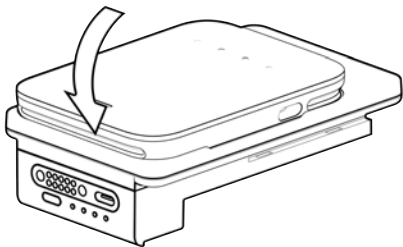

Attention

To continue the assembly process, please refer to the Get Started instruction booklet.

Attention

DISASSEMBLY

Attention


Please refer to the Get Started instruction booklet to begin disassembly.

Attention

DISASSEMBLY


1

Remove the NYC1 Reader by lifting from the bottom edge.

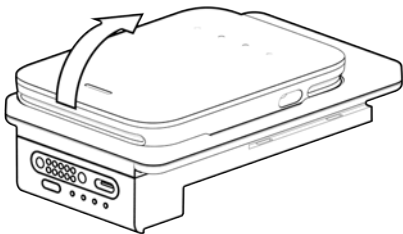

2

Slide the feet of the Cartridge (D:1) out of the slots on the Core (B) to release.

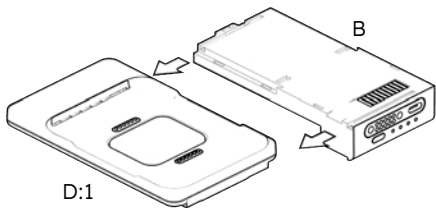

Disassembly Complete

